

Simple  
Sanitary  
Cost Effective



# EASY-CLEAN UNIFLEX OVERVIEW

The Easy-Clean UniFlex auger/screw conveyor is a simple, but ruggedly designed conveyor. This versatile piece of equipment is capable of transporting a wide range of free flowing powders, granules, or small pellets safely and reliably. It features rounded corners for ease of cleaning and is totally fabricated from type 304 stainless steel.

Easy-Clean UniFlex conveyors easily integrate with a vast array of upstream and downstream equipment. The Easy-Clean UniFlex conveyor is comprised of two main sections, a fixed lower portable base frame with 4 swivel casters, and an upper conveyor assembly.

The lower portable frame supports a bearing-shaft pivot system which allows the upper conveyor to be tilted down to a horizontal position. This upper conveyor assembly supports the infeed hopper, casing and drive / discharge assembly.

**RELIABLE**

**PORTABLE**

**FOOD-GRADE**

**ONLY ONE MOVING PART**


**SIMPLE TOOL-FREE  
DISASSEMBLY**



# CAPACITY

**UP TO 6 CU.FT./MIN**

(depending on product characteristics)

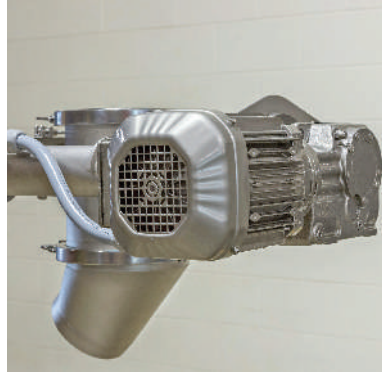

# MATERIALS HANDLED

- ANIMAL FEED SUPPLEMENT
- BREAD CRUMBS
- CHICK PEAS, LENTILS
- COFFEE
- CORN STARCH
- FLAX
- FLOUR
- GRANULATED GARLIC
- GUAR POWDER
- MUSTARD SEED
- PEANUTS
- PROTEIN POWDER
- RICE PASTA
- STARCH
- SPICE BLENDS
- SUGAR
- VEGETABLES - DEHYDRATED
- WHEAT FLOUR

Sanitary stainless steel wash down gearmotor (OS4 protection)


Quick disassembly - fast reassembly - tool-less cleaning



Elimination of flat surfaces that can hold product

Casing - easily removed with tool-free T-handle clamps

Hopper corners are rounded for easy cleaning

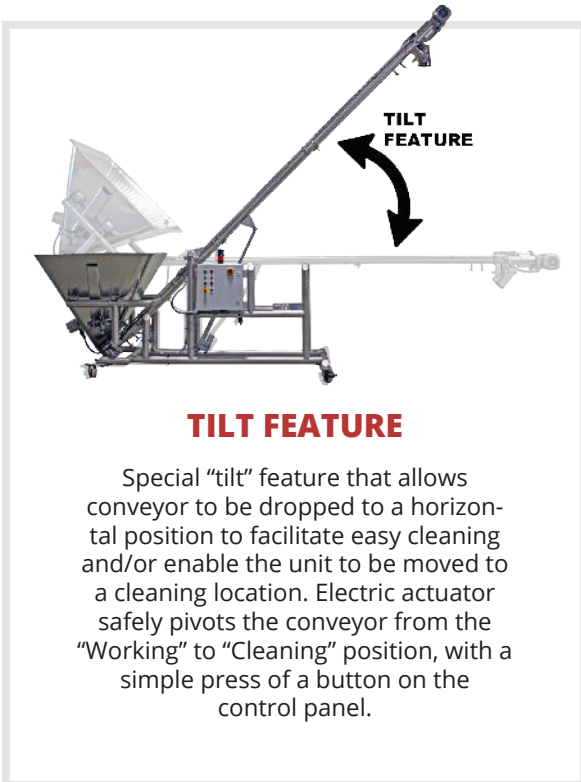

## TILT FEATURE

Special "tilt" feature that allows conveyor to be dropped to a horizontal position to facilitate easy cleaning and/or enable the unit to be moved to a cleaning location. Electric actuator safely pivots the conveyor from the "Working" to "Cleaning" position, with a simple press of a button on the control panel.



Control panel - NEMA 4X



Bolted-in safety grate



Discharge chute & drive assembly



Auger casing - 3" or 5"; UHMW or stainless steel



Did you know that UniTrak specializes in high-care solutions for our customers?

LEARN MORE AT: [UNITRAK.COM/HIGH-CARE](http://UNITRAK.COM/HIGH-CARE)

**SALES@UNITRAK.COM**

**TEL NA: 1.905.885.8168 UK: +44 (0) 1457 865038**